


SWITCH RACK NOTES:


1. VERIFY ALL DIMENSIONS BEFORE FABRICATION.
2. REMOVE BURRS AND GRIND SHARP CORNERS AND EDGES. TOUCH UP AS REQUIRED AFTER WELDING AND DRILLING.
3. FIELD GROUT UNDER BASE PLATE.
4. ANCHOR BOLTS SHALL BE 4 INCH IN CONCRETE AND SHALL BE PROVIDED WITH HEX NUTS AND WASHERS.
5. ALL ALUMINUM SHALL BE 6061.
6. MINIMUM CONCRETE STRENGTH SHALL BE 3000 PSI.
7. MAXIMUM OF 6 FEET BETWEEN SUPPORT COLUMNS.
8. ALL UNISTRUT SHALL BE ALUMINUM TYPE.

TYP. ELECTRICAL SWITCH RACK DETAIL

SCALE: NONE

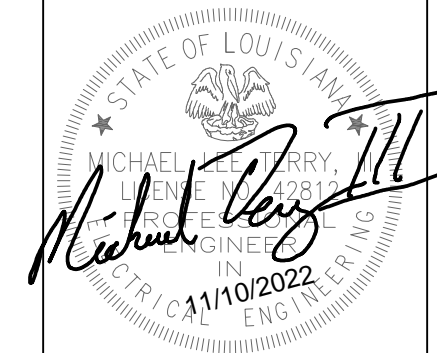

IF THIS BAR DOES NOT MEASURE 1"
(BASED ON 22"x34" SHEET) THEN
DRAWING IS NOT TO SCALE.



**H. Davis Cole &
Associates, LLC**
Consulting Engineers

NEW ORLEANS, LA

DATE:	08/24/22	DESIGNED BY:	SPG							
DETAILED BY:	SPG	DRAWN BY:	SPG							
HDC PROJECT NO.	2021-14	CHECKED BY:	MLT	1	MARK	ADDENDUM #5 DESCRIPTION	11/10/22	DATE	SPG	MLT
										CHKD.
REVISION RECORD										

NEW RIVER TILTING WEIR STRUCTURE	LOUISIANA
ASCENSION PARISH	
EAST ASCENSION CONSOLIDATION GRAVITY DRAINAGE DISTRICT 1	
ASCENSION PARISH	
ELECTRICAL DETAILS & PARTS SCHEDULES	